

*standard and special
custom designed*

LoLIFT

*hand
hydraulic
Roll Handling
trucks*

*..... featuring
leak-proof
hydraulic units and
minimum maintenance.*



"THE PALLET TRUCK THAT NEEDS NO LUBRICATION"

design features


Handle locks in upright position when not in use.

Lowering speed of load is hydraulically controlled.

Hydraulic unit is easily removed by releasing three bolts.

Steering wheels mounted on roller bearings; steel, rubber, celeron, polyurethane wheels available.

Manoeuvres in cramped areas . . . 200° pivot action.

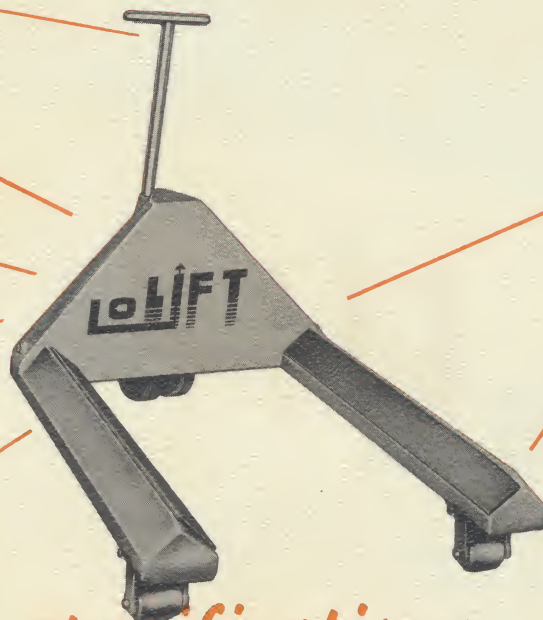

All parts fully tested for strength and long term performance.

Unit frame construction: lighter in weight with built-in overload capacity.

Tapered end assists entry and exit.

Rear wheels mounted on roller bearings; steel, rubber, celeron, polyurethane available.

specifications

MODEL 26		MODEL 44
2600 lbs.	Load Capacity	4400 lbs.
4 3/4"	Raised Lift of forks	4 3/4"
As required	Overall width across forks	As required
As required	Width of fork bar	As required
As required	Space between forks	As required
As required	Length of forks	As required
3"	Diameter of fork wheels	3"
8"	Diameter of main wheels	8"
200"	Pivot angle	200"
Overall length as above plus 15"		

MODEL 26
2600 lbs.
\$ 315.00

MODEL 44
4400 lbs.
\$ 365.00

MFR'D BY



P.O. BOX 2258 • CLEVELAND, OHIO 44109

RUSHMORE & WEBER INC.
LATHAM, N. Y.
PHONE STATE 5-8548

RUSHMORE & WEBER INC.
LATHAM, N. Y.
PHONE STATE 5-8548